

PRODUCT DATA SHEET

MDH-1360 100 Kgs Door Holder

FEATURES

- ✓ 24Vdc (100mA)
- ✓ Wall mounting
- ✓ Reversible release button
- ✓ 100kg Rated
- ✓ Spring ejected
- ✓ Anvil included



PRODUCT DESCRIPTION

The MDH1360 is made from high quality di-cast aluminium and steel and finished in black powder coat, which makes them very robust, attractive and compact. They also feature a high quality easy-to-use releasing switch that can be conveniently mounted on either side of the surface mounting unit.


The door holder current consumption, heavy duty anvil and holding capacity of 100kg is adequate to retain fire doors, swinging or sliding on all of your installations.

FireSense also supply a momentary release switch on a standard gang plate to allow release of fire door from an easily accessible location.

TECHNICAL SPECIFICATIONS

Mounting	Wall mounted
Operating Voltage	24Vdc
Current Consumption	40-100mA
Holding Force	100kgs
Housing Structure	Di-cast Aluminium
Protection	IP42
Dimensions	94mm x 94mm x 52mm

WALL MOUNT

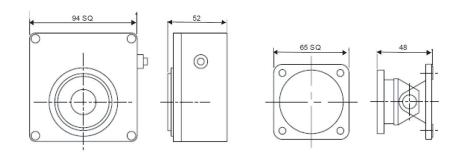

NSW 18-20 Brookhollow Ave NORWEST 2153 02 8850 2888 sales@firesense.com.au VIC Unit 4, 297 Ingles St PORT MELBOURNE 3207 03 9646 4557 salesvic@firesense.com.au QLD Unit 2, 225 Queensport Rd North MURARRIE 4172 07 3890 8842 salesqld@firesense.com.au

