

### FEATURES

- ✓ Loop powered (no separate 24Vdc required)
- ✓ LED indication
- ✓ FlashScan - 159 per loop
- ✓ 2 x change-over contacts
- ✓ Rotary wheel for ease of addressing



### PRODUCT DESCRIPTION

The SSF-FRM1 Addressable Relay Module provides 1 x logical output with 2 x change-over clean-contact outputs for activating a variety of auxiliary devices, such as fans, dampers, control equipment, etc. Compatible for use with 2800 & 3030.


Addressability allows the contact to be activated, either manually or through panel programming, on a select basis. The SSF-FRM1 is powered from the 2 wire addressable loop and is suitable for switching external voltages of up to 32Vdc.

Each SSF-FRM1 uses one of 159 available module addresses on a loop.

### TECHNICAL SPECIFICATIONS

Nominal Operating Voltage	15 to 32Vdc
Maximum Current Draw	6.5mA (LED on)
Average Operating Current	230uA direct poll, 255uA group poll
Temperature Range	0°C to 49°C
Humidity Range	10 to 93% non-condensing
Dimensions	118mm H x 110mm W x 35mm D
Mounting Box (SS-SMB500)	125mm H x 125mm W x 52mm D

### CONNECTION INFORMATION

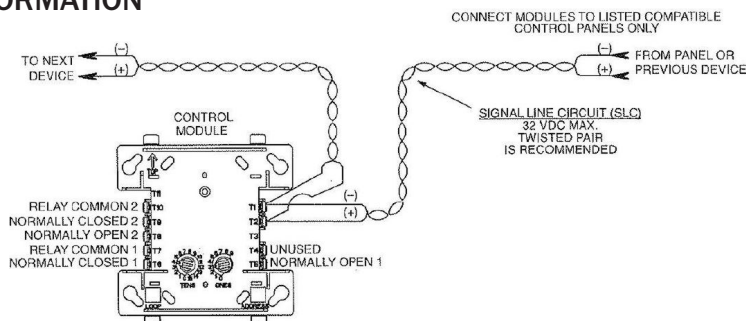

### APPROVALS

- ✓ SSL Approved
- ✓ ActivFire certified - Listing No. afp-1801
- ✓ SAI Global: Certificate No. SMKH25312