

FEATURES

- ✓ Low current draw
- ✓ Surface mountable
- ✓ 2 wire, 3 wire or 4 wire configuration
- ✓ Simple terminal block connection
- ✓ Red and amber strobe on a white plate
- ✓ 100mA each




PRODUCT DESCRIPTION

Dual strobe for emergency evacuation systems. Housed in a sturdy, white powder-coated steel case, this unit is designed for professional installers of fire and evacuation systems. Features simple bolt on installation and conduit knockouts for cable entry. A terminal block allows quick power connection. Can be configured for 2, 3 or 4 wire operation.

TECHNICAL SPECIFICATIONS

Power supply	24Vdc
Current draw	100mA
Flash rate	1.5Hz
Flash energy	3.12 Joules
Conduit knockout diameter	19mm
Dimensions (overall)	85mm H x 285mm L x 122mm W
Individual strobe dimensions	100mm Ø x 80mm H

DIMENSIONS

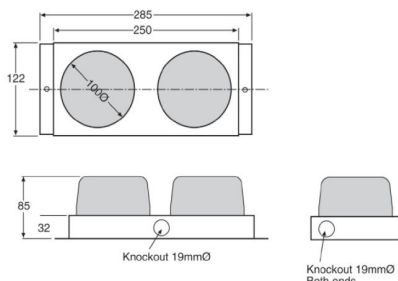

APPROVALS

- ✓ SSL Approved to AS2220.1-1989
- ✓ ActivFire certified - Listing No. afp-1122

