

FEATURES

- ✓ Easy to use keypad layout
- ✓ Up to 30 paging zones
- ✓ Optional WIP control
- ✓ Connects to the standard EWIS Network
- ✓ Priority paging
- ✓ Gooseneck or desktop microphone
- ✓ Software controlled zoning



PRODUCT DESCRIPTION


Each paging console gives selective zone paging for up to 30 zones. These zones do not need to be the same as evacuation zones. Programming of any combinations of amplifiers into paging zones can be done. Refer to the configuration printout for details of the current configuration.

If the system has more than 30 paging zones then more than one paging console can be used at the same location to address the zones. Only one microphone is required.

TECHNICAL SPECIFICATIONS

Cabinet	Zinc sealed steel 1.6mm Powder coated charcoal grey (standard)
Dimensions	18U: 400mm W x 75mm H x 210mm D
Supply Voltage	24Vdc

CONNECTION INFORMATION

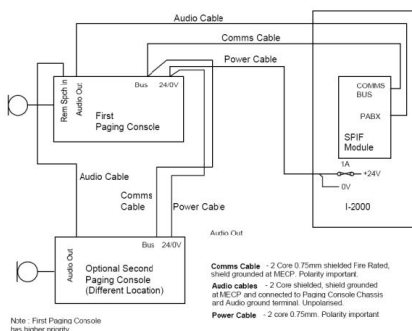

APPROVALS

- ✓ SSL approved to AS2220.1 - 1989
- ✓ ActivFire certified - Listing No. aft-1122