

FEATURES

- ✓ Wide-range 4" slim line
- ✓ 6W dual-cone dynamic loudspeaker
- ✓ 100V line transformer
- ✓ 5 tapings to choose from
- ✓ Metal grill
- ✓ In-built 2.2uF capacitor for monitoring
- ✓ Available in both black and white
- ✓ Surface mount box option



PRODUCT DESCRIPTION

The FireSense FS-SP4 is a slim line wide range 4" dual cone loudspeaker. It is made from ABS resin and finished off with an off white or black metal grill.

By utilizing a dual clamping method, this allows quick installation and reduces labour. Also as an option the FS-SP4 can clip straight into a surface mount enclosure (FS-SP4-SMB).

TECHNICAL SPECIFICATIONS


Rated Power	6W, 100V line transformer
Transformer Power Taps	0.375W, 0.75W (default), 1.5W, 3W, 6W
Sensitivity	92dB, 1W @ 1m
Maximum SPL	~100dB @ 6W
Frequency Response	130Hz ~ 20kHz
Speaker Unit	4"
Dimensions	Ø 160mm x 75mm
Weight	630g
Material	ABS
Colour	White (RAL9003) or Black
Surface Mount Box Dimensions	Ø 245mm x 75mm
Cutout Dimensions	Ø 140mm
Packaging	24 to a box
Weight	17kg per box

OPTIONS


FS-SP4-SMB	Surface mount enclosure to suit FS-SP4
FS-SP4-BK	100mm ceiling speaker with metal grill – Black
FS-SP4-SMB-7240-BK	Surface mount enclosure to suit FS-SP4 and FS-SP4-7240 - Black



SPL / Frequency Graph

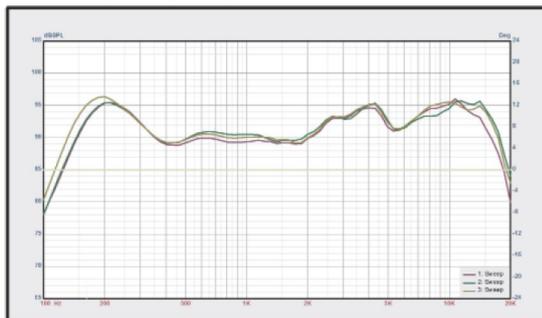

Polar Plot

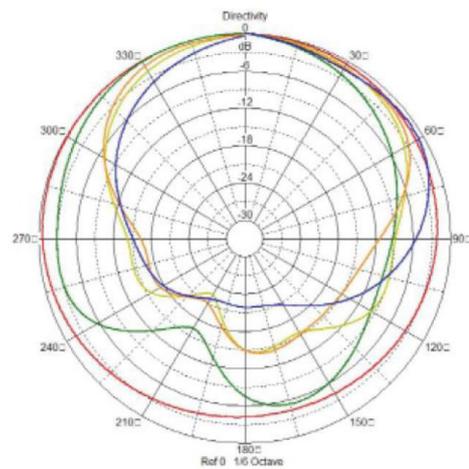

CLIO