

## FEATURES

- ✓ Conforms with EN54-23 / AS ISO 7240.23-2014
- ✓ LED Technology
- ✓ Unique optics for light management
- ✓ Up to 7.5m coverage
- ✓ Coverage switch
- ✓ Flash rate switch
- ✓ Wide input voltage range
- ✓ Soft start up
- ✓ Locking bases
- ✓ Meets the required illumination 0.4 lux over entire area
- ✓ For smaller areas switch down from 7.5m to 2.5m. This reduces power consumption by up to 50%
- ✓ 1Hz or 0.5Hz setting, reducing power consumption



## PRODUCT DESCRIPTION

The STR-SOL-W-RR wall product takes its slim line design queues from the SOLISTA range. Available in a red body colour and with a shallow or deep base, the SOLISTA wall type is suitable for a variety of applications.

AS ISO 7240.23-2014/EN54-23 coverage reference W-2.4-7.5.

## TECHNICAL SPECIFICATIONS

Mounting Type	Wall
Voltage	9-60Vdc
Current	10-25mA dependent on setting
Coverage	7.5m (switchable to 2.5m)
Mounting Height	2.4m (max)
Coverage Volume Code	W-2.4-7.5
Coverage Volume	135m <sup>3</sup> (15m <sup>3</sup> )
Flash Rate	1Hz (switchable to 0.5Hz)
Operating Temperature	-25°C to +70°C
Monitoring	Reverse polarity
Protection	IP33 Shallow Base, IP65 Deep and U Base
Weight	100g
Body Colour	Red
Flash Colour	Red


#### CURRENT CONSUMPTION

	2.5m/0.5Hz	2.5m/1Hz	7.5m/0.5Hz	7.5m/1Hz
White Flash	10mA	16mA	16mA	25mA
Red Flash	10mA	16mA	16mA	25mA

#### ORDERING INFORMATION

STR-SOL-W-RR	Red body, red flash
FULL-R-D-BASE	Red deep base to increase rating to IP65
FULL-MAINS-BASE	Red deep IP65 rated 240V mains base

#### DIMENSIONS

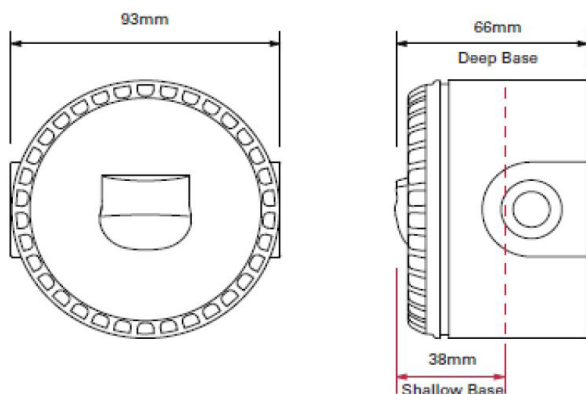

#### APPROVALS

- ✓ SAI Global: Certificate No. SMK40585