

STR-SOU-W-RW/STR-SOU-W-WW AS7240.23 Combined Sounder Strobe

FEATURES

- ✓ Ultra-low current consumption
- ✓ Sounder option selectable
- ✓ Up to 1.5m coverage volume (switchable to 2.5m)
- ✓ 0.5 or 1Hz flash rate

BENEFITS

- ✓ Use where current consumption is a key consideration
- ✓ Delivering up to 106dB(A) sound output
- ✓ Ideal for bedrooms, bathrooms and toilets
- ✓ Switch flash rate to 0.5Hz to reduce current consumption




PRODUCT DESCRIPTION

The STR-SOU-W-RW / STR-SOU-W-WW is ideal for dual use applications where a visual alarm device is required in addition to an audible alarm.

Based on the popular FLASHNI product platform, the strobe/sounder is a reliable, high performing VAD (Visual Alarm Device) that is certified to AS7240.23 and AS7240.3.

This device is recommended for wall use and requires just one installation point.

DIMENSIONS

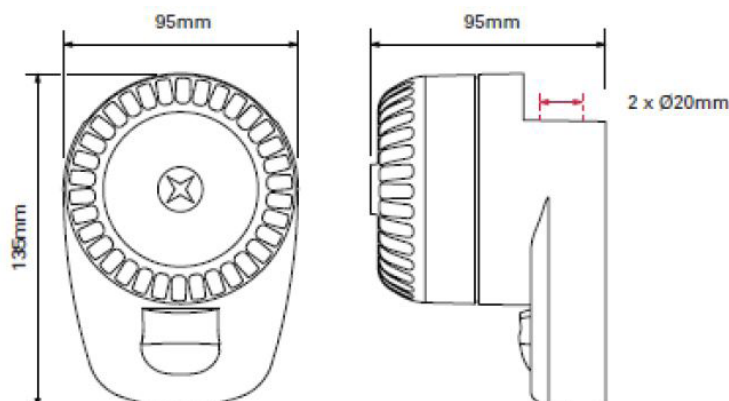

TECHNICAL SPECIFICATIONS

Mounting	Wall
Voltage	18-28Vdc (fire use) 9-15Vdc (fire use)
Current	22-37mA dependent on setting (sounder and beacon; tone 3)
Coverage (y)	7.5m (switchable to 2.5m)
Mounting height (x)	2.5m (max)
Coverage volume code	W-2.4-7.5
Coverage volume	135m ³ (15m ³)
Flash rate	1Hz (switchable tp 0.5Hz)
Operating temperature	-25°C to +70°C
Monitoring	Reverse polarity
Protection	IP65
Weight	200g
Body colour	White or red
Flash colour	White
Sound output	102dB(A) (typical tone 3)

ORDERING INFORMATION

STR-SOU-W-WW	ROLP LX Sounder Beacon, White Body, White Base, White Flash, Wall Mount
STR-SOU-W-RW	ROLP LX Sounder Beacon, Red Body, Red Base, White Flash, Wall Mount

APPROVALS

- ✓ SAI Global: Certificate No. SMK40585