

#### FEATURES

- ✓ High immunity to false sources
- ✓ Tolerant of fumes, vapours, dust and mist
- ✓ Suitable for indoor areas
- ✓ Unaffected by convection currents, draughts or wind
- ✓ Proven response to multiple fuel types
- ✓ Multi-spectrum detection
- ✓ Selectable output options
- ✓ Selectable response speed
- ✓ Selectable sensitivity levels
- ✓ Built in auto and manual test
- ✓ Low current consumption
- ✓ Fast response to fire
- ✓ Detects flames through glass



#### PRODUCT DESCRIPTION

The dual Infra-Red (IR<sup>2</sup>) Flame Detector is designed to protect areas where open fires may be expected and detects almost all flames, including hydrocarbon fires with 4.3  $\mu\text{m}$  emissions through to invisible fires such as hydrogen.

The IR<sup>2</sup> Flame Detector is sensitive to flickering, low frequency (1-15Hz) infra-red radiation emitted by flames during combustion even if the lens is contaminated by a layer of oil, dust, water, vapour or ice.

This detector has two IR sensors which respond to different IR wavelengths in order to discriminate between flames and spurious sources of radiation. False alarms from flickering sunlight are avoided by a combination of filters and signal processing techniques.

The IR<sup>2</sup> detector has selectable output options of relay contacts or 4-20mA signal, as standard.

*Note: This is an indent item, lead times of up to 4-6 weeks may apply.*

#### APPLICATIONS

- ✓ Chemical plants
- ✓ Waste recycling
- ✓ Nuclear power sites
- ✓ Engine rooms
- ✓ Pharmaceutical production
- ✓ Military applications
- ✓ LNG/LPG production
- ✓ Printing
- ✓ Spray booths
- ✓ Coal handling
- ✓ Compressor stations
- ✓ Marine industry
- ✓ Tunnels

**TECHNICAL SPECIFICATIONS**
**MECHANICAL**

Housing material	Die Cast Zinc Alloy (ZA12)
Housing colour	Blue
Dimensions	142mm H x 108mm W x 79mm D
Weight	1.75kg
Cable Gland Entries	2 x 20mm
Wiring	1.0 to 4.0mm <sup>2</sup>

**ELECTRICAL**

Sensor supply	14 to 30Vdc
Quiescent current	8mA, RL2 energised 4mA, current loop, RL2 off 3mA, RL2 off
Alarm current	28mA, RL1 & RL2 energised 20mA, current loop, RL1 & 2 off 9mA, RL1 energised
Power up time	2 seconds max
Test signal voltage	14 to 30Vdc
Relay outputs	Programmable Ratings: current Voltage Power
	Normally open or normally closed. Latching or non-latching 0.75A max. 48Vdc max. 30W max. (Note: resistive loads only)

**PERFORMANCE**

Range	- Class 1: - Class 3:	0.1m <sup>2</sup> n-heptane at 25m 0.1m <sup>2</sup> n-heptane at 12m (see EN54:10 for sensitivity settings)
Field of View		90° min. cone
Operating wavelength band - IR		1.0 to 2.7µm

**ENVIRONMENTAL**

Operating temperature	-10°C to +55°C
Storage temperature	-20°C to +65°C
Relative humidity	95% non-condensing
IP rating	IP65

#### RESPONSE CHARACTERISTICS - HIGH SENSITIVITY

Fuel	Flame Size (m)	Certified distance (m)	Average response time (sec.)
n-Heptane (yellow flame)	0.1 x 0.1	25	12
Methylated spirit (clear flame)	0.25 x 0.25	25	25


#### ACCESSORIES

- ✓ **INT-AM:** Adjustable mount (required for all flame detectors)
- ✓ **INT-DET-TESTER:** Portable flame detector testing unit

#### APPROVALS

- ✓ CPR - 0832-CPR-F0582
- ✓ LPCB - 1204a/10
- ✓ AFNOR - LIR 009 A2
- ✓ SIL 2 - C127\_CT003\_(2.0)

#### Field of View

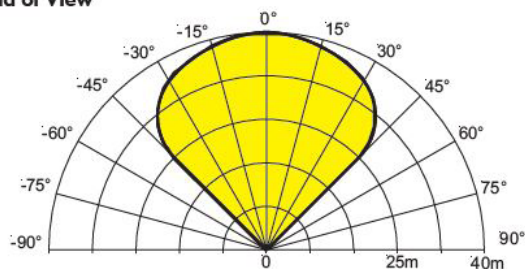

To meet the requirements of EN54:10 clause 5.4, where the ratio of the response points  $D_{max} : D_{min}$  should not exceed 1.41, the horizontal and vertical viewing angles max should not exceed  $\pm 30^\circ$ .

