



#### Features:


- 4 Stereo RCA line inputs (internally mono mixed).
- Individual bass, treble and volume controls
- 8 Balanced 3 pin XLR line outputs.
- Individual volume controls of all 8 outputs.
- Pre chime tone generator included
- Programmable labelling of input sources and output zones via USB keyboard.
- 240V AC or 24V DC operation.
- 19" Rack Mount (2 unit).

#### Description:

The FS-ALT-4480 is designed to meet the demands of today's complex installations. This is a very versatile, cost effective, PA/BGM control system and is suitable for clubs, pubs, gyms, campus sites, etc. In total there are 14 inputs – including, 1 zone paging & emergency paging input, 8 local inputs and 4 auxiliary inputs.

#### Specifications:

<b>Auxiliary Inputs</b>	Dual RCAs 0.3/0.7V
<b>Local Inputs</b>	RJ45
<b>Outputs</b>	3 pin XLR balanced line
<b>Dimensions</b>	482W x 152D x 88H mm

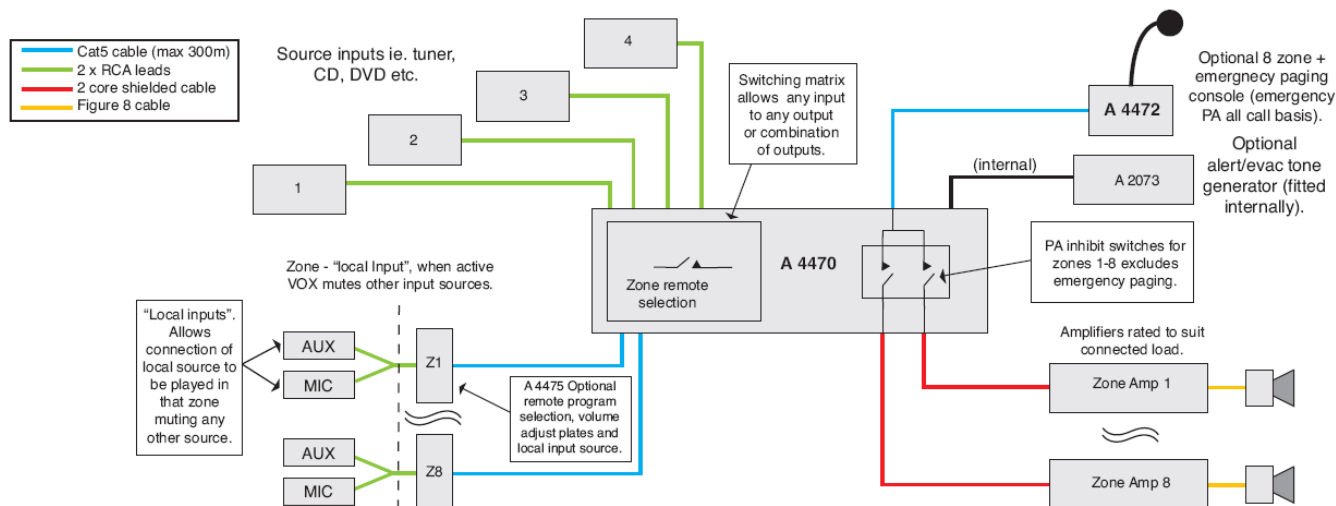

**Accessories:**



**Optional Mic: (FS-4470-MIC)**

Designed specifically for use with the FS-ALT-4470 audio switcher, the addition of this microphone enables local paging to any zone or combination of zones. Paging to any any zone may be inhibited by selecting the paging on/off function for individual zones on the FS-ALT-4470. The paging microphone may be located up to 300 metres from the FS-ALT-4470 and all audio and control signals are carried via an inexpensive Cat 5 or similar data cable.