




Features:

- Wide-range 4" slim line
- 6W dual-cone dynamic loudspeaker
- 100V line transformer
- 5 tapings to choose from
- Metal grille
- In-built 2.2uF capacitor for monitoring
- Available in both Black and White
- Surface mount box option


Description:

The FireSense FS-SP4 is a slim line wide Range 4" dual cone loudspeaker. Made from ABS resin and finished off with an off white or black metal grille.


By utilizing a dual clamping method, this allows quick installation and reduces labour. Also as an option the FS-SP4 can clip straight into a surface mount enclosure (FS-SP4-SMB).

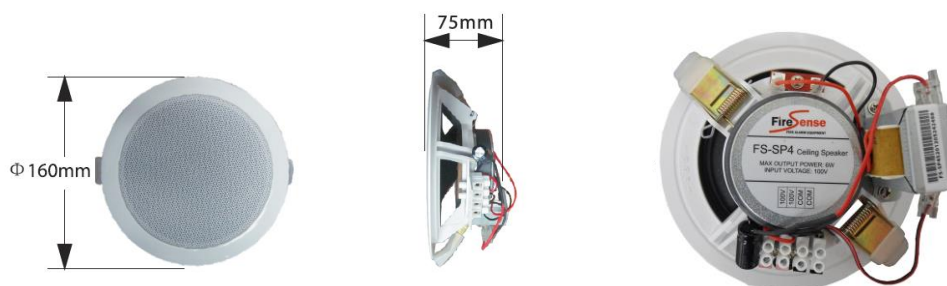

SPL / Frequency Graph

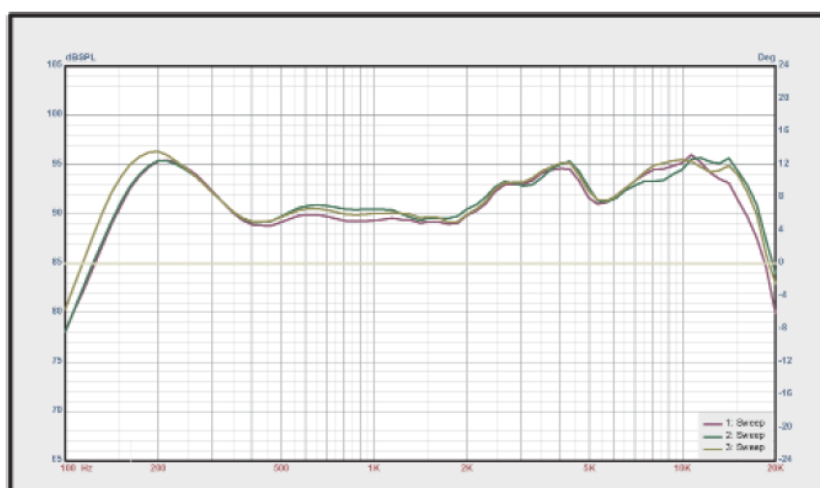

Polar Plot

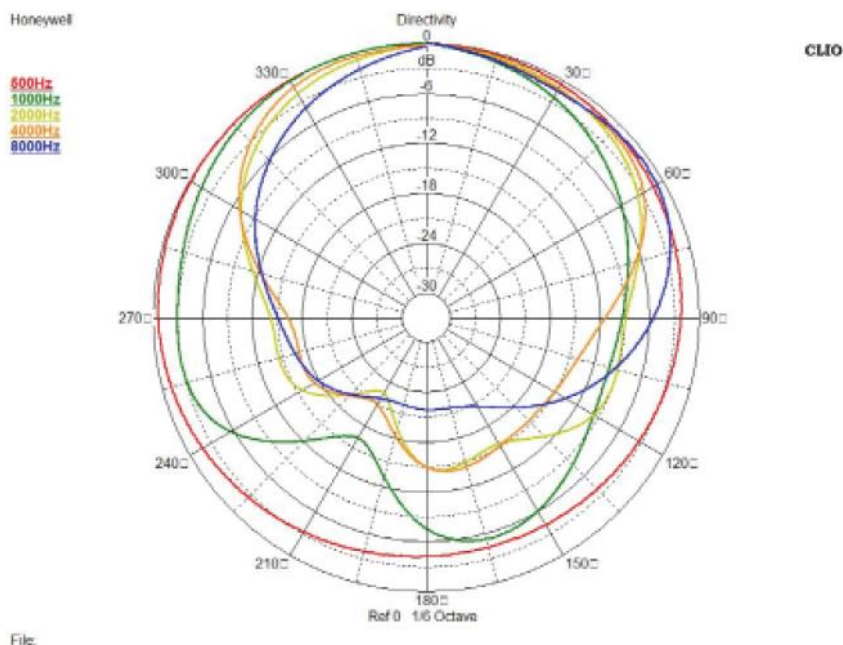

Specifications:

Rated Power:	6W, 100v line transformer
Transformer Power Taps:	0.375W,0.75W,1.5W,3W,6W
Sensitivity:	92dB, 1W @ 1m
Maximum SPL:	101dB
Frequency Response:	130Hz ~ 20kHz
Speaker Unit:	4"
Dimensions:	Ø 160mm x 75mm
Weight:	630g
Material:	ABS
Colour:	White (RAL9003)
Surface Mount Box Dimensions:	Ø 245mm x 75mm
Cutout Dimension:	Ø 140mm
Packaging:	24 to a box
Weight:	17kg per box

Options:

FS-SP4-SMB :	Surface mount enclosure to suit FS-SP4
FS-SP4-BK:	100mm ceiling speaker with metal grill – Black
FS-SP4-SMB-BK:	Surface mount enclosure to suit FS-SP4 - Black