

FEATURES

- ✓ Built-in type identification
- ✓ Powered directly from loop, no additional power required
- ✓ High noise (EMF/RFI) immunity



PRODUCT DESCRIPTION


The SSF-FMM101 Miniature Monitor Module is a 2 wire monitored input device for use with 2800 & 3030 panels operating in FlashScan mode (159 detectors and 159 modules per loop).

It is capable of monitoring normally open contact fire alarm and supervisory devices; or either normally open or normally closed security devices.

TECHNICAL SPECIFICATIONS

Nominal Operating Voltage	15 to 32Vdc
Average Operating Current	350uA (1 communication every 5 seconds, 47k EOL)
EOL Resistance	47K Ohms
Temperature Range	0°C to 49°C
Humidity Range	10% to 93% non-condensing
Dimensions	33mm H x 70mm W x 12mm D

CONNECTION INFORMATION

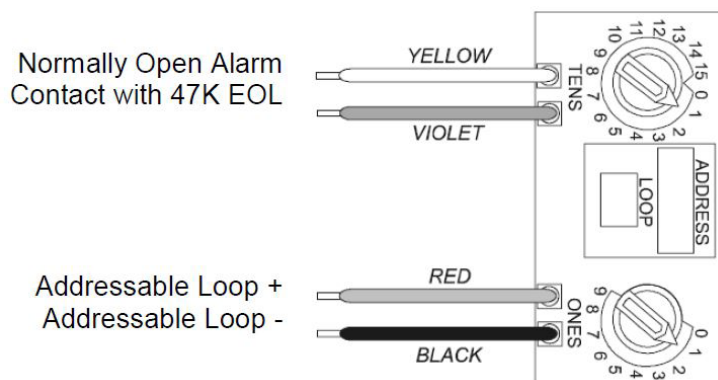

APPROVALS

- ✓ SSL Approved
- ✓ ActivFire certified - Listing No. afp-1801
- ✓ SAI Global: Certificate No. SMKH25312